

Tyco/Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RXEF135

DOCUMENT: SCD 25224
 PCN: E76253
 REV LETTER: A
 REV DATE: MAY 19, 2003
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 72V MAX

Current: 40A MAX

Insulating Material:

Cured, Flame Retardant Epoxy Polymer
 meets UL94 V-0 Requirements

Lead Material:

20 AWG Tin Plated Copper Clad Steel

Marking:

- ┌───┐ Raychem Logo and Voltage
- ⊗ 72
- XF135 ─── Part Identification
- ─── Lot Identification (can be on back)

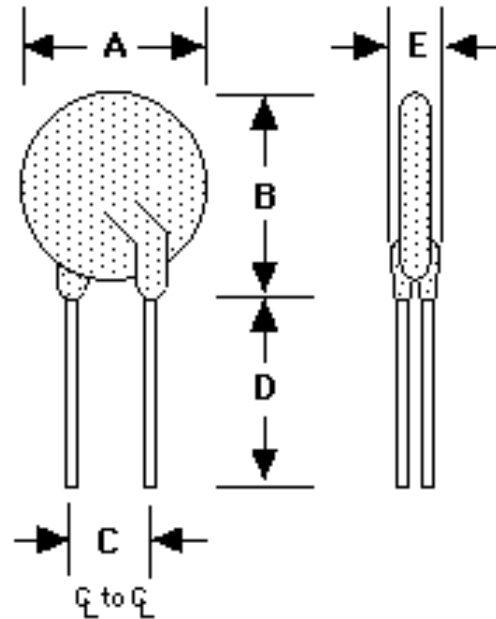


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	14.5	--	19.1	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.57)	--	(0.75)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS :

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	OHMS AT 20°C		SECONDS AT 20°C, 6.75A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
			MIN	MAX			
1.35	1.35	2.70	0.12	0.19	9.6	0.30	1.7

Recognitions:

UL, CSA and TUV recognized.

Approved by UL as a current limiting impedance, per t 1996 NEC, Tables 11 (c) and 11 (b).

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.